

SADDLE TANK




SUBMITTAL DATA

Project	Representative
Location	Date submitted
Engineer	Approved by
Contractor	Date of approval

DESCRIPTION

Saddle tanks are used to secure horizontal tanks preventing the tank from displacing. Made of iron with a primer paint finish. Saddle tanks need to be drilled to the concrete floor before placing the tank in the horizontal position.

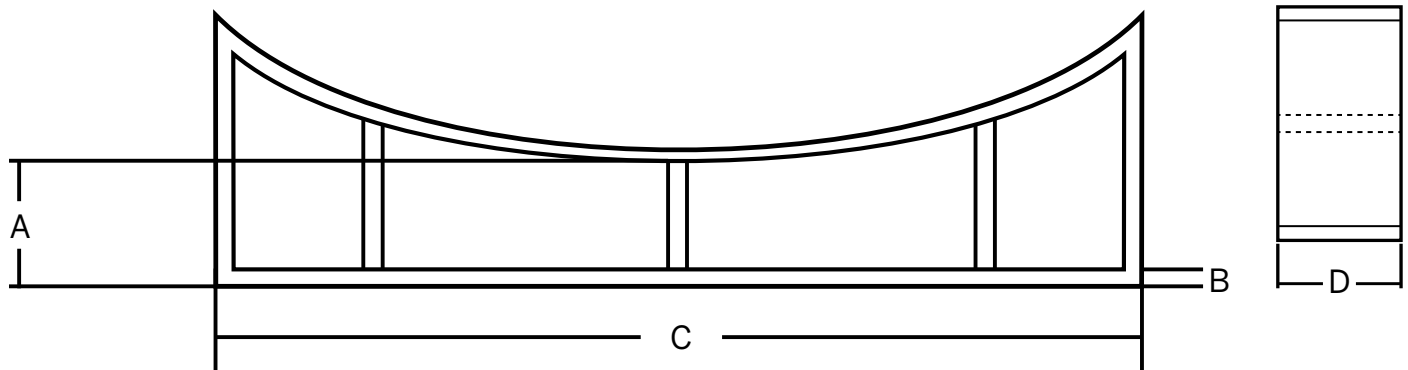

SPECIFICATIONS

MODEL	TANK DIAMETER		HEIGHT A		THICKNESS B		WIDTH C		DEPTH D	
	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM
SAD10	10	25.4	3	7.6	.1875	0.5	8	20	3	7.6
SAD12	12	30.5	3	7.6	.1875	0.5	10	25	4	10
SAD14	14	35.5	3	7.6	.1875	0.5	11	28	4	10
SAD16	16	40.6	3	7.6	.1875	0.5	13	33	4	10
SAD18	18	46	4	10	.1875	0.5	14	36	4	10
SAD20	20	51	4	10	.1875	0.5	14	36	4	10
SAD24	24	61	4	10	.1875	0.5	17	43	4	10
SAD28	28	71	4	10	.2500	0.6	22	56	5	13

MODEL	TANK DIAMETER		HEIGHT A		THICKNESS B		WIDTH C		DEPTH D	
	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM
SAD30	30	76	4	10	.2500	0.6	22	56	5	13
SAD36	36	91.5	4	10	.2500	0.6	26	66	5	13
SAD42	42	107	4	10	.3750	1	29	74	6	15.2
SAD48	48	122	4	10	.3750	1	34	86	6	15.2
SAD54	54	137	4	10	.3750	1	38	97	6	15.2
SAD60	60	152	4	10	.3750	1	42	107	6	15.2
SAD66	66	168	4	10	.3750	1	46	117	6	15.2
SAD72	72	183	4	10	.3750	1	50	127	6	15.2

Québec (Canada)

T 450 951.0818

F 450 951.2165

info@calefactio.com

calefactio.com

CAL-SUB-SADDLE-202102-E