Submittal Data



2" PUMP FLANGE VALVE 2" NPT WITN NO DRAIN

Job Name:	Submitted by:	Date:
Location:	Approved by:	Date:
Engineer:	Order No.:	Date:
Contractor:	Notes:	
Sales Rep.:		

DESCRIPTION

INCLUDED

- Full port brass ball valve
- Ball valve isolation for circulating pumps
- Rotating flange
- 2 gauge ports
- ► 500 CWP (Cold Working Pressure)

INCLUDED	
1 gasket	

- 2 nuts and 2 bolts
- 0-30 PSI (#GAGE0-30BOTTOM)


OPTIONAL

 ½" MNPT Pressure gauge 0-100 PSI (#GAGE0-100BOTTOM)

1/8" MNPT Pressure gauge



Model#	Size	A		В		С		D		E		F		G		Weight	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lb	kg
PF200N-ND	2″	6	150	4 ½	116	3⁄4	19	4 ¾	119	1⁄2	13	3½	88	4	97	4.8	2.2

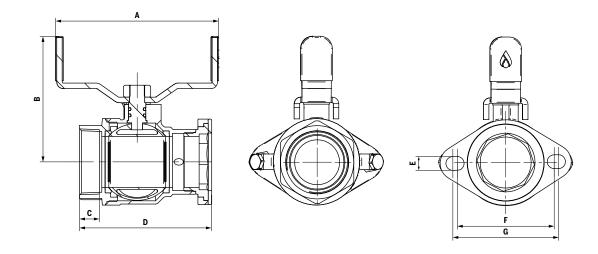

TYPICAL SPECIFICATIONS

Designed for residential, commercial, or industrial use with water or a glycol mixture. This Calefactio pump flange value is activated by a blowout proof stem. Multi-directional main value allows for draining from either side of the pump. Do not silver braze or overheat values when soldering.

calefactio.com