



Instruction


TANKLESS WATER HEATER VALVE KIT

DESCRIPTION


Each Calefactio tankless water heater valve kit includes two isolation valves with drain and a 150 PSI pressure relief valve. Some kits are also offered with a 30 PSI pressure relief valve.

The valves are easy to install and provide secure and tight seals. The drains and the colored handles simplify the maintenance of the system. They are made of brass and certified lead free to ensure lasting durability.

NPT

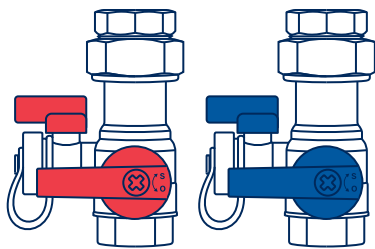


#TK075N • #TK075N-30

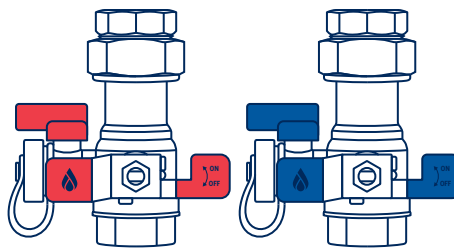


#TK100N • #TK100N-30

PRESS

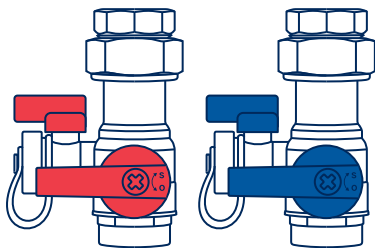

#TK075S

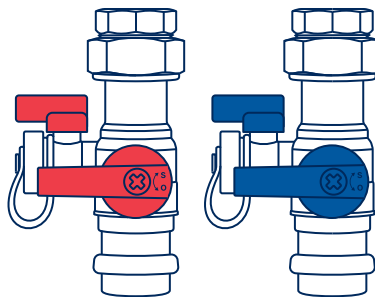

#TK075P

Included



Pressure Relief Valve

30 PSI or 150 PSI

NEW

Scan the QR code to
see the online version.



NSF/ANSI CAN
372-2022
61-2022



WARNING


Before connecting any components, be sure to read all of tankless water heater manufacturer's installation instructions.

INSTALLATION

1.

Before connecting the valves to the water heater, screw the pressure relief valve on the side of the hot water valve (red).


- a) Apply thread sealant to the threads.
- b) The drains should be positioned in front of you.



2.


Connect the valves to the tankless water heater using thread sealants.

- a) Using a wrench to tighten the hot water valve (red) and cold water valve (blue) on the tankless water heater.
- b) The drains should be positioned in front of you.



3.

Finally, attach the drain line to the pressure relief valve.

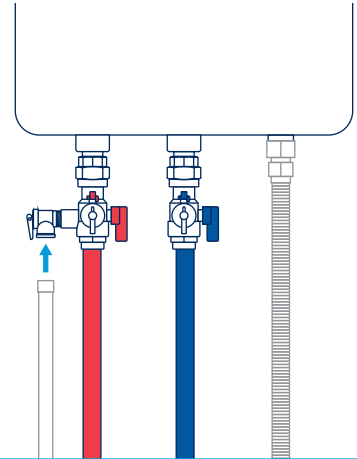

TECHNICAL SPECIFICATIONS


Isolation Valve

Model#	Connect.	Width		Height		Weight	
		in	mm	in	mm	lb	kg
TK075N†	¾"	3	76.6	4	102	2.9	1.3
TK075P†	¾"	3	76.6	4	102	2.9	1.3
TK075S†	¾"	3	76.6	4	102	2.7	1.2
TK075N-30*	¾"	3	76.6	4½	114	4.0	1.8
TK100N†	1"	3	76.6	4½	114	4.0	1.8
TK100N-30*	1"	3	76.6	4½	114	4.0	1.8


† 150 PSI pressure relief valve included
* 30 PSI pressure relief valve included

Pressure Relief Valve


Max Pressure	Connect.	Width		Height		Maximum Heating Input	Certification	Weight	
		in	mm	in	mm			lb	kg
30 PSI	¾"	2	51	2½	63.5	419,000 BTU	ASME	0.66	0.3
150 PSI	¾"	2	51	2½	63.5	200,000 BTU	CSA ANSI Z21.22	0.44	0.2




#TK075N • #TK075N-30



#TK075S



#TK075P



#TK100N • #TK100N-30

NEW

WARRANTY

Calefactio offers a 5 years limited warranty from the date of manufacture. The warranty is only valid if the product is installed and used under normal working conditions and for the purpose it was intended.

Quebec, Canada
T 450 951.0818
F 450 951.2165

Instagram: calefactio_solutions
Facebook: calefactio
LinkedIn: calefactio-solutions-inc

calefactio.com

 **CALEFACTIO**
Improve what's best