

TANKLESS WATER HEATER VALVE KIT

Job Name: _____

Submitted by: _____

Date: _____

Location: _____

Approved by: _____

Date: _____

Engineer: _____

Order No.: _____

Date: _____

Contractor: _____

Notes: _____

Sales Rep.: _____

DESCRIPTION

Each Calefactio Tankless Water Heater Valve kits includes two isolation valves with drain and a 150 PSI pressure relief valve. Some kits are also offered with a 30 PSI pressure relief valve.




The valves are easy to install and provide secure and tight seals. The drains and handles are designed to simplify maintenance of the system. They are made of brass and certified lead free to ensure lasting durability.

Advantages

- ▶ Secure seal
- ▶ Compact
- ▶ Lead free
- ▶ Facilitate maintenance with dedicated ports
- ▶ Easy identification of hot and cold valves
- ▶ Pressure relief valve included

Technical specifications

- ▶ Made in brass
- ▶ Maximum temperature: 180°F
- ▶ Connections: NPT, Sweat or Press, 3/4 or 1"

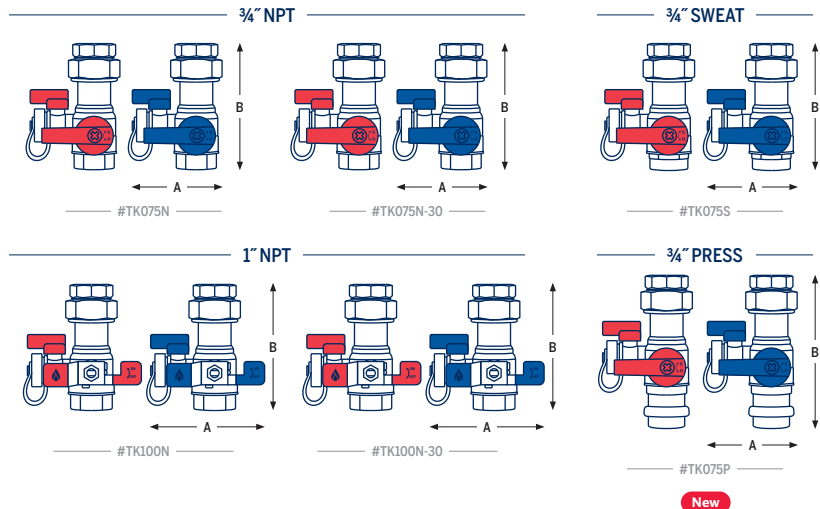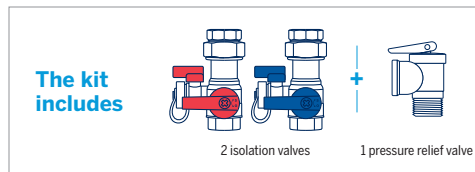

Model#	Connect.	Maximum Pressure	Maximum Heating Input	A		B		C		D		Weight	
				in	mm	in	mm	in	mm	in	mm	lb	kg
TK075N†	3/4"	150 PSI	200,000 BTU	3	76.6	4	102	2	51	2.5	63.5	3.3	1.5
TK075P†	3/4"	150 PSI	200,000 BTU	3	76.6	4	102	2	51	2.5	63.5	3.3	1.5
TK075S†	3/4"	150 PSI	200,000 BTU	3	76.6	4	102	2	51	2.5	63.5	3.1	1.4
TK075N-30*	3/4"	30 PSI	419,000 BTU	3	76.6	4 1/2	114	2	51	2.5	63.5	4.7	2.1
TK100N†	1"	150 PSI	200,000 BTU	3	76.6	4 1/2	114	2	51	2.5	63.5	4.4	2.0
TK100N-30*	1"	30 PSI	419,000 BTU	3	76.6	4 1/2	114	2	51	2.5	63.5	4.7	2.1

† 150 PSI pressure relief valve included

* 30 PSI pressure relief valve included

TYPICAL SPECIFICATIONS

Furnish and install as shown on plans and described as follow a Calefactio tankless water heater valve kit with a _____ in connection and a _____ PSI pressure relief valve. The kit must contain a two isolation valves and one pressure relief valve. The kit must be Calefactio's _____ model or approved equivalent.