



TANKLESS WATER HEATER VALVE KITS

Calefactio Tankless Water Heater Valve Kits are compact and easy to install. The drains and handles are designed to simplify maintenance of the system.



Pressure relief valve
30 PSI ou 150 PSI

Compact and easy to install

Simplify <u>mainte</u>nance

Strong and durable







SIMPLIFY THE INSTALLATION AND MAINTENANCE OF TANKLESS WATER HEATER








They are made of brass and certified lead free to ensure lasting durability.


ADVANTAGES

- Secure seal
- Compact
- ► Lead free
- ▶ Facilitate maintenance with dedicated ports
- ▶ Easy identification of hot and cold valves
- ▶ Pressure relief valve included

TECHNICAL SPECIFICATIONS

- ► Made in brass
- Maximum temperature: 180°F
- ► Connections: NPT, Sweat or Press, ¾" or 1"



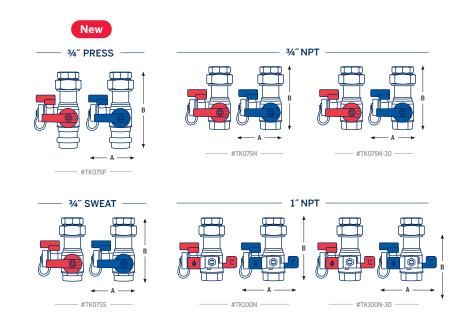



	Model#	Connect.	Maximum Pressure	Maximum heating input	A		В		С		D		Weight	
					in	mm	in	mm	in	mm	in	mm	lb	kg
-	TK075N	3/4"	150 PSI	200 000 BTU	3	76.6	4	102	2	51	2.5	63.5	3.3	1.5
-	TK075P New	3/4"	150 PSI	200 000 BTU	3	76.6	4	102	2	51	2.5	63.5	3.3	1.5
-	TK075S	3/4"	150 PSI	200 000 BTU	3	76.6	4	102	2	51	2.5	63.5	3.1	1.4
-	TK075N-30	3/4"	30 PSI	419 000 BTU	3	76.6	41/2	114	2	51	2.5	63.5	4.7	2.1
-	TK100N	1″	150 PSI	200 000 BTU	3	76.6	41/2	114	2	51	2.5	63.5	4.4	2.0
-	TK100N-30	1″	30 PSI	419 000 BTU	3	76.6	41/2	114	2	51	2.5	63.5	4.7	2.1



Quebec, Canada T 450 951.0818 F 450 951.2165 © calefactio_solutions

f calefactio

in calefactio-solutions-inc

