


CALTHERM MEGA

▶ HEADERS FOR RADIANT FLOOR HEATING

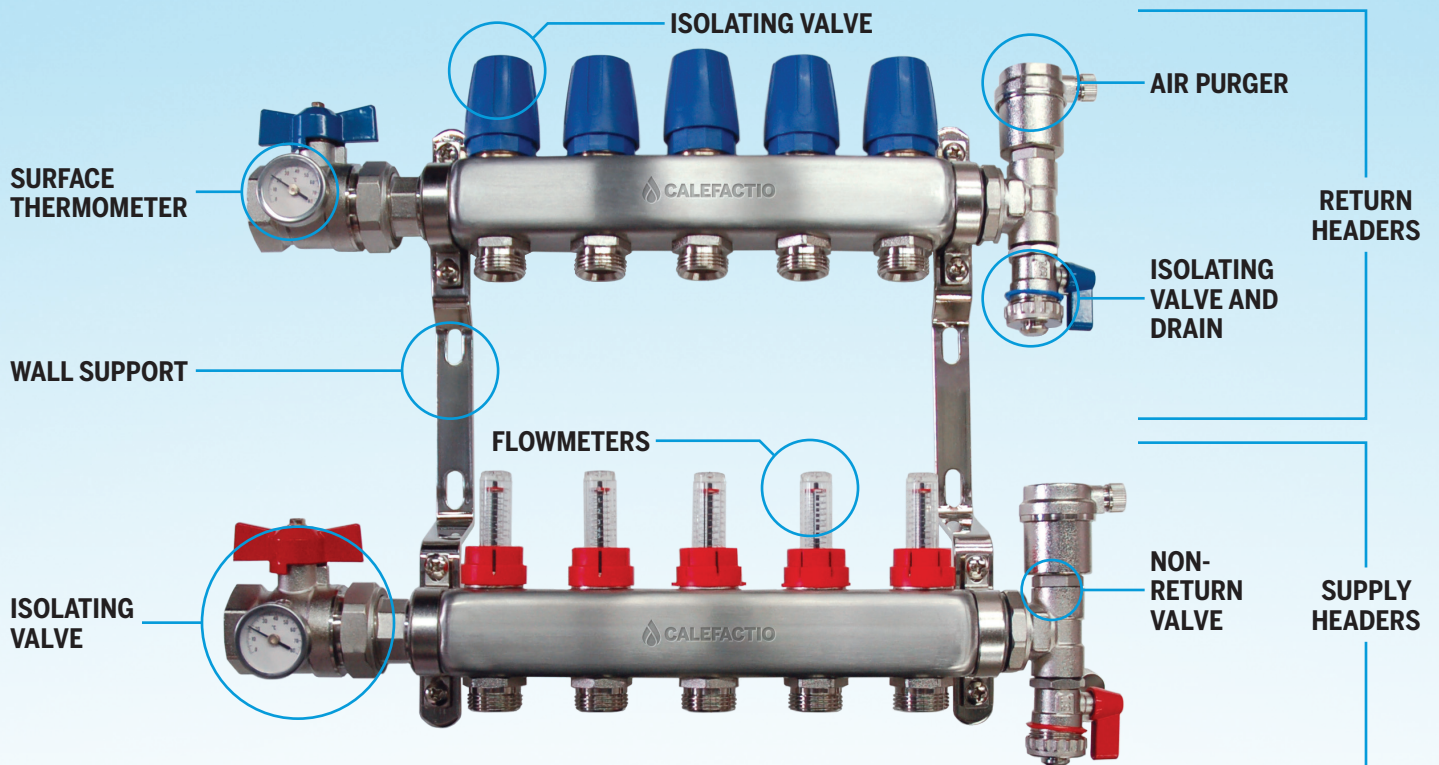

Calefactio's stainless steel manifold kit is delivered pre-assembled and ready to install. Headers are offered in 9 sizes for a total of 18 models (2 to 12 loops, 1¼ in or 1½ in connections) with a maximum flowrate of 25.2 gallons per minute (GPM). They come in pair and the kit includes supply and return headers, isolating valve, wall support, flowmeter, surface thermometer (0-80°C), air purger and drain. The integrated flowmeters allow the user to adjust the flow easily in each loop. Circuit isolation valves are also compatible with 24V actuators from Calefactio (#AC24VNC).

FEATURES AND BENEFITS

- ✔ Made of 304 stainless steel
- ✔ 1¼ in or 1½ in ball valve connections
- ✔ Pre-assembled on wall support
- ✔ Integrated flowmeters (7.9 LPM/2.1 GPM per loop)
- ✔ Maximum pressure: 125 PSI/862 kPa
- ✔ Maximum temperature: 230°F/110°C
- ✔ Provided with air purger and drain
- ✔ Compatible with 24V actuators from Calefactio (#AC24NC)
- ✔ NPT ball valve with integrated thermometer
- ✔ Compatible with glycol used for heating
- ✔ Possibility to isolate each loop with isolating valve and balancing valve