F1960 CRIMP RINGS / SUBMITTAL DATA

CALEFACTIO

PROJECT

Representative: _____ Project: _____

Date Submitted: _____ Submitted by: _____

Date Approved: _____ Approved by: _____

☐ **#CPR12** Quantity: _____

☐ **#CPR58** Quantity: _____

☐ **#CPR34** Quantity _____

Description

PEX-a expansion rings with stop for use with PEX F1960 fittings.

Technical Specifications

- **Material**
  Crosslinked polyethylene (PEX-a)
- **Maximum temperature**
  200°F (93,3°C)

Standards

NSF-pw	CSA B137.5
ASTM F1960	NSF/ANSI 14
ASTM F877	

Model #	Conn.	A		OD		ID		Weight	
		in	mm	in	mm	in	mm	lb	g
CPR12	½"	0.66	16.7	0.88	22.3	0.62	15.7	0.0044	2
CPR58	⅝"	0.78	19.8	1.00	25.4	0.75	19.0	0.0066	3
CPR34	¾"	0.88	22.4	1.13	28.7	0.87	22.1	0.0088	4,5

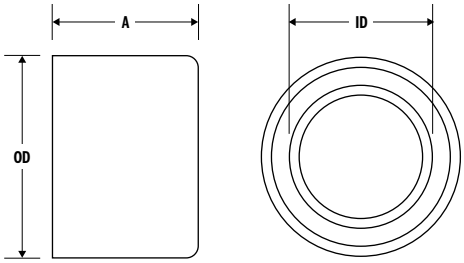

WARRANTY Calefactio Solutions Inc. offers a one-year limited warranty from the date of purchase.
The warranty is only valid if the product is installed and used under normal working conditions and for the purpose it was intended.

Quebec, Canada
T 450 951.0818
F 450 951.2165

calefactio_solutions
calefactio
calefactio-solutions-inc

calefactio.com

012-SUB-RINGS- F1960-EN-2021-08