



Instructions

TANKLESS WATER HEATER SERVICE VALVES KIT

Model #TK075NTE

DESCRIPTION

Calefactio's service valves kit is designed for tankless water heaters under 2 gallons. It combines two isolation valves including drains, a pressure relief valve, a union tee, and a port on the cold side for an expansion tank. The Calefactio HGTE Series expansion tank is precharged at 50 PSI. The maximum pressure is 150 PSI and the maximum operating temperature is 180°F (82°C).

WARNING


Before connecting any components, be sure to read all of tankless water heater manufacturer's installation instructions.

INSTALLATION

- Before connecting the valves to the water heater, screw the pressure relief valve on the side of the hot water valve (red).
 - Apply thread sealant to the threads.
 - Using a wrench to tighten the pressure relief valve until it is seated down.
- Connect the valves to the tankless water heater using thread sealants.
 - Using a wrench to tighten the hot water valve (red) and cold water valve (blue) on the tankless water heater.
 - The drains should be positioned in front of you.
- Finally, attach the drain line to the pressure relief valve.

TECHNICAL DATA

#Model	Hot water valve (red)				Cold water valve (blue)				Total Weight	
	A		B		A		B		lb	kg
	po	mm	po	mm	po	mm	po	mm		
TK075NTE	5 ½	139,7	4	101,6	5 ½	139,7	7 ¼	184,15	3,8	1,72

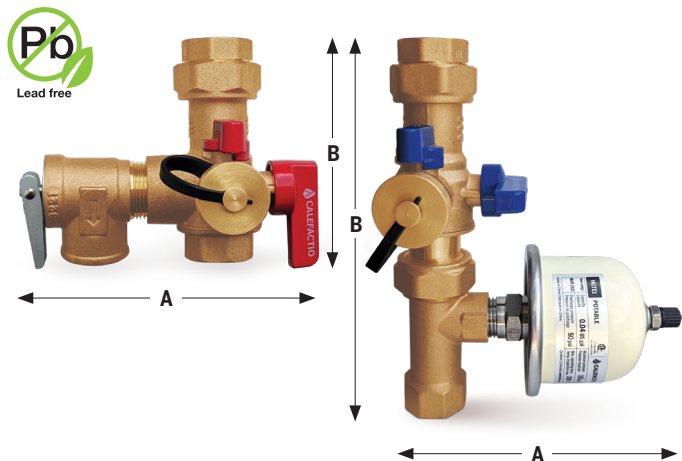

WARRANTY

Calefactio offers a five(5) years limited warranty from the date of purchase. The warranty is only valid if the product is installed and used under normal working conditions and for the purpose it was intended.

Québec, Canada
 T 450 951.0818
 F 450 951.2165

[calefactio_solutions](#)
[calefactio](#)
[calefactio-solutions-inc](#)

[calefactio.com](#)

